




### MULTI4 INTEGRATED I 120

All dimensions are in mm [in]

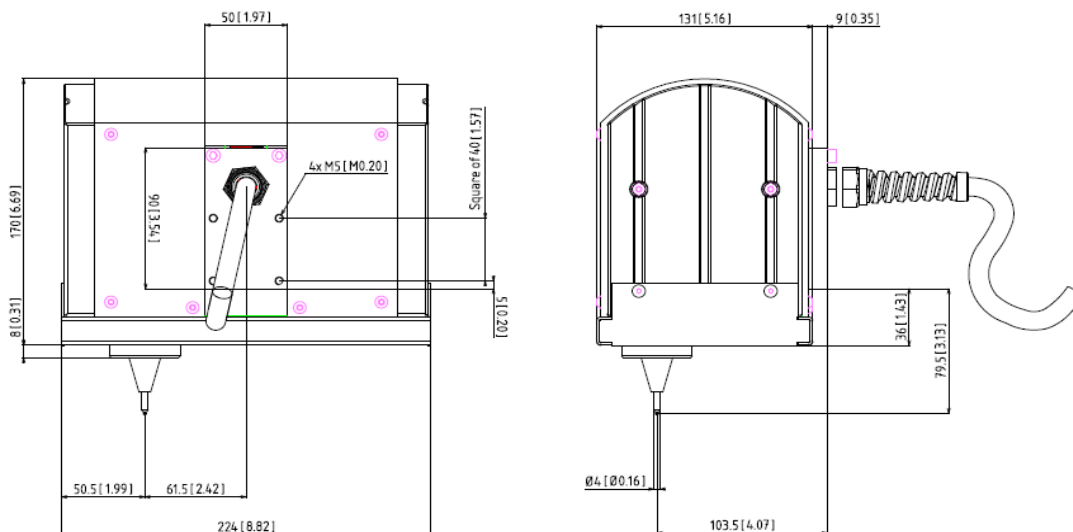

Marking window 120x60mm (4,72x2,36")  
 Weight with cable 5,1 Kg  
 Weight without cable 4,4 Kg

#### Dimensions : L x l x h

224 mm(8.82") x 140 mm(5.51") x 214 mm(8.34")

#### Power supply :


- Integrated in the control box 90 to 240 V

#### Environment :

- Machinery directives : 98/37/CE
- Electro-magnetic compatibility : 2006/95/CE
- Low power directives : 2004/108/CE
- FCC directive - chapter 15
- Usage temperatures from : 0 to 45° C  
 (from 32 °F to 115° F)

#### Technical Features :

- Marking height from 0,5 mm up to 99,9 mm by 0,1mm increments  
 0,19 " to 3,93 " by 0,038 " increments
- Marking area : 120 x 60 mm - 4,8 " x 2,4 "
- Font types : 5 x 7, 9 x 13 "continuous" lines are available
- Alphanumerical Capitals and small letters and logos marking
- Time-recording and team work data recording
- Angular and circular marking
- Autonomous mode
- Slave mode : RS 232
- Micro-contact
- " Easy Shift " graphic function
- Programmable depth
- Intelligent driving Impact

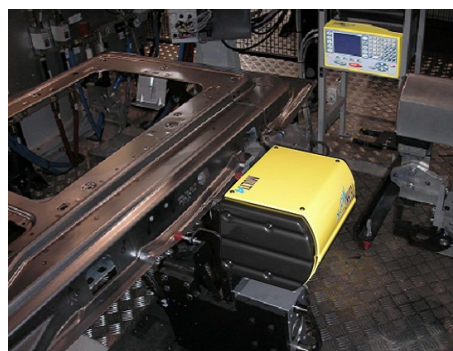

#### On option :

- Softwares : Technolog; Technoprod; Technosave; Technowindows; Technomatrix; Techno IO
- 3 Inputs / Outputs Cable
- RJ 45 (Ethernet)
- 5/10 m (16/33 feet) Cable

#### Delivered with :

- Auto-adjustable protection grommet on the base to ensure mechanical cleanliness and reduced maintenance
- 1 Blinded 3 m (10 feet) cable

\* *Exists in version compact and extra-large*

**ITEM CODE : MT4I 120**