



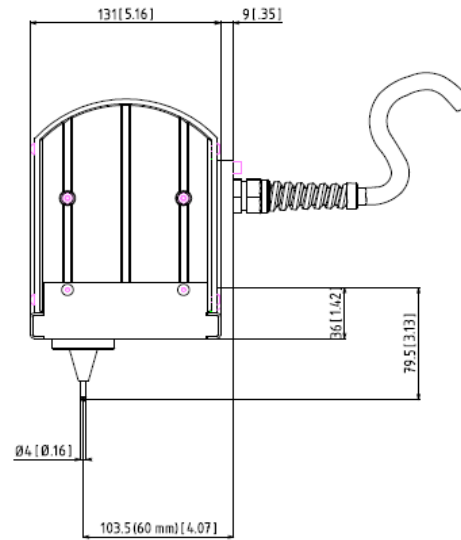

All dimensions are in mm (in)

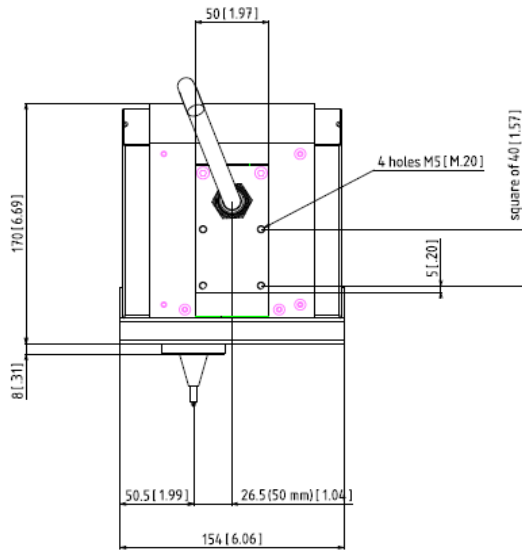

Marking area 50x60 mm [1,96x2,38"]
Weight with cable 4,6 Kg
Weight without cable 3,8 kg

Dimensions : L x l x H

154mm(6") x 140mm(5,51") x 214mm(8.34")

Power supply :

- Integrated in the control box 90 to 240 V

Environment :

- Machinery directives : 98/37/CE
- Electro-magnetic compatibility : 2006/95/CE
- Low power directives : 2004/108/CE
- FCC directive - chapter 15
- Usage temperatures from :
0 to 45° C (from 32 °F to 115° F)

Technical Features :

- Marking height from 0,5 mm up to 99,9 mm by 0,1mm increments
0,19 " to 3,93 " by 0,038 " increments
- Marking area : 50 x 60 mm - 1,95" x 2,34"
- Font types : 5 x 7, 9 x 13 "continuous" lines are available
- Alphanumerical Capitals and small letters and logos marking
- Time-recording and team work data recording
- Angular and circular marking
- Autonomous mode
- Slave mode : RS 232
- Micro-contact
- " Easy Shift " graphic function
- Programmable depth
- Intelligent driving Impact



On option :

- Softwares : Technolog; Technoprod; Technosave; Technowindows; Technomatrix; Techno IO
- 3 Inputs / Outputs Cable
- RJ 45 (Ethernet)
- 5/10 m (16/33 feet) Cable

Delivered with :

- Auto-adjustable protection grommet on the base to ensure mechanical cleanliness and reduced maintenance
- 1 Blinded 3 m (10 feet) cable

* *Exists in version large and extra-large*



ITEM CODE : MT4I 50